
ALL THE BENEFITS OF BEVMAX4. ALL THE VERSATILITY OF A NARROW UNIT.










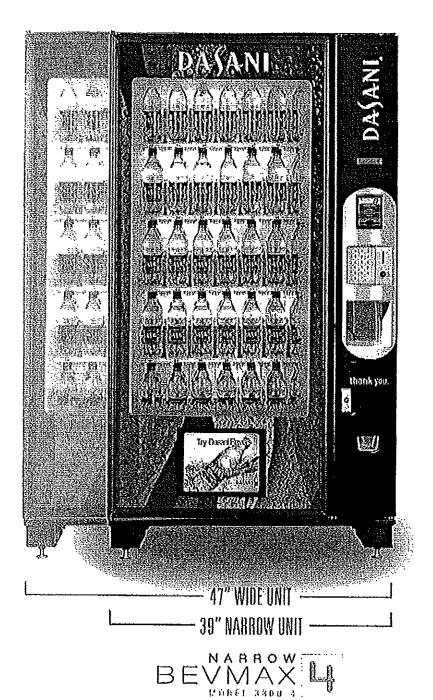












...two times more energy efficient than machines made five years ago.



ENERGY EFFICIENT REFRIGERATION PLATFORM

	kWh per year	Increased Operating Costs per Year
BevMAX4-Narrow	£ 1070	
Compositor A	2042	**************************************
Competitor B	2100	- 4570 ,865] +63%
5-Year Old Machine	2871	\$104,09 - 100%


Tier 2

Energy STAR

BevMax4 Narrow exceeds ENERGY STAR Tier 2 Standards. The only Glass Front to exceed the Department of Energy 2012 Conservation Standards.

Figures based on the national average per kWh - January 2009 (\$0.1103 per kWh). *Actual energy usage may vary based on environmental conditions.

Only BevMax4 has been designed to enhance the consumer experience and meet the operational needs of bottlers and vending operators.



RELIABILITY

The most reliable, dependable vending solution proven by independent 20,000 vend operating tests; 80,000 vend life-cycle tests and comprehensive field testing exceeding 238,000 vends.


SIMPLIFIED MAINTENANCE


Low profile modular refrigeration platform removes from the front or the back of the machine,



VERSATILITY


Increase your sales and profitability by replacing an aging stack vender with a Narrow BevMax4, With a similar footprint as many stack machines, the BevMax4 offers an alternative size for those accounts with space restrictions,





EFFICIENCY

A "shimless" vend mechanism addresses costly labor and service concerns. Load any package in any position. Eliminate loading errors. Load fast with both hands. Bottles remain firmly in place (even if the machine is rocked).



SPEED

Who likes to wait in line? BevMax4 delivers product in only 8 seconds. Faster delivery time increases sales, speed of service and customer satisfaction.



SPECIFICATIONS

DIMENSIONS 72" H x 39" W x 32" D (183cm H x 99cm W x 82cm D)

WEIGHT 545 lbs. empty (247 kg)

ELECTRICAL 120 VAC, 60 Hz, 10.2 amps MDB Level 3 Controller

REFRIGERATION 184A CFC-Free Refrigerant Gas 1/3 HP Compressor

CERTIFICATIONS UL, CUL, CE, FOC, NOM, CTICK



3330 DDG-HARCO BLYD., WALLSTON, SC 29853 TEL: 800-688-9090 I FAX: 803-268-5150 I WWW.DDGEHARCO.COM